



IF IN DOUBT PLEASE ASK

D	Diameter (End)	5mm
Ds	Diameter (Shank)	6mm
L	Length Of Cutting Edge	13mm
Ls	Length to Shank	18mm
Dn	Shank Neck Diameter	4.9mm
Lo	Overall Length (Blank)	58mm
T	Taper Angle (OD)	
R	Corner Radius	0.5mm
N	Number Of Flutes	4
P	Primary Relief (OD)	
Rd	Raised Depth (OD)	
Rw	Raised Land (OD)	
Sw	Secondary Land Width	
F	Flute Depth	
Ra	Flute Rake (Hook)	
Ty	Relief style	
Pe	Primary Relief (End)	
Pl	Primary Land (End)	
Se	Secondary Relief (End)	
Da	Dish Angle (End)	
Ax	Axial Gash Angle	
h	Gash Pad Width	
H	Over Centre Length	
Y	Gash Web Thickness	
Hx	Helix Angle	
Ga	Gash Angle (L/S)	
Ro	Permissible Runout	
Rl	Raised Land Length	




QuickVend Location	
Quickgrind Stock	
QuickVend Stock	

Customer: Quickgrind

Customer Approval: Brian Pearce

Date: 18/10/22

CUSTOMER APPROVAL: Please check all drawing details, signing this document will signify customer acceptance and will be final. Signatory confirms that they are authorised to sign such documents on behalf of the company.

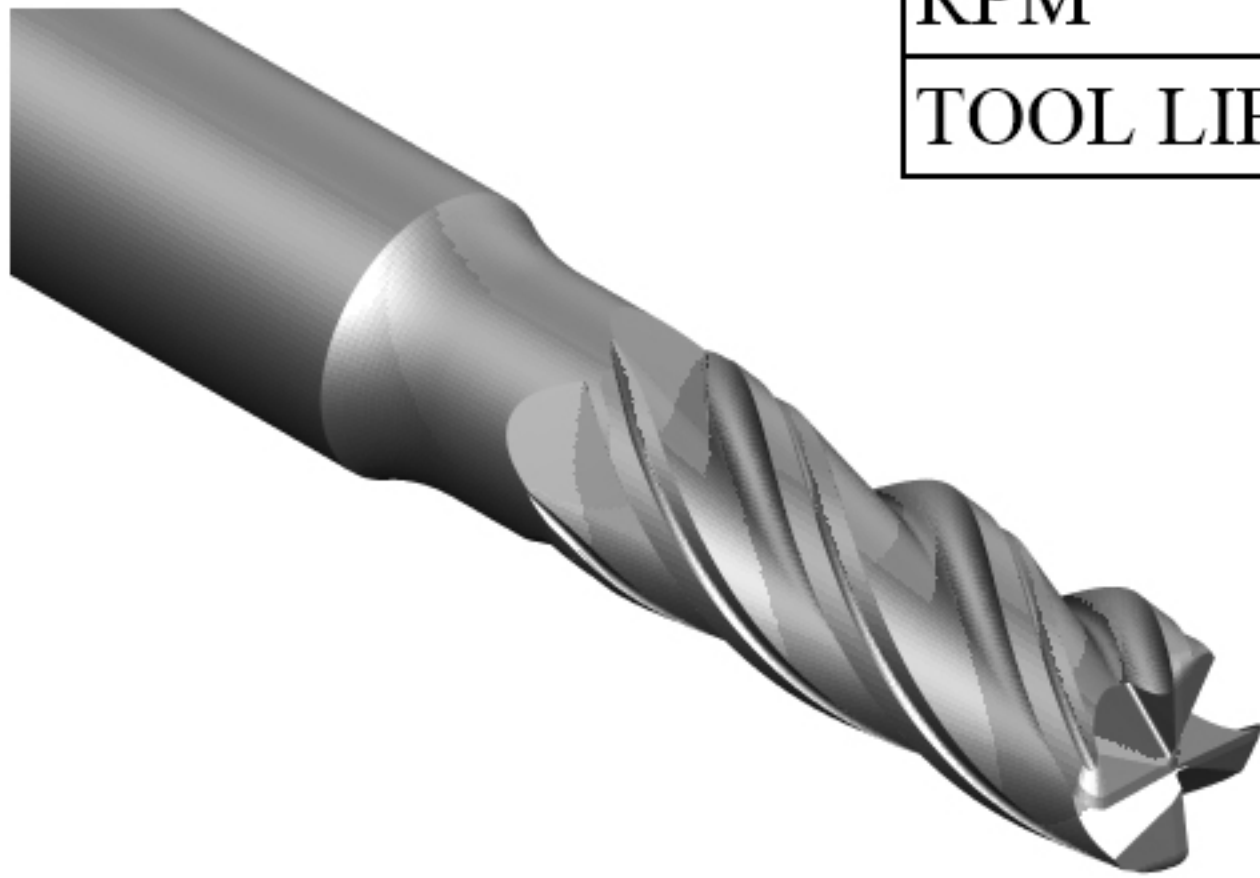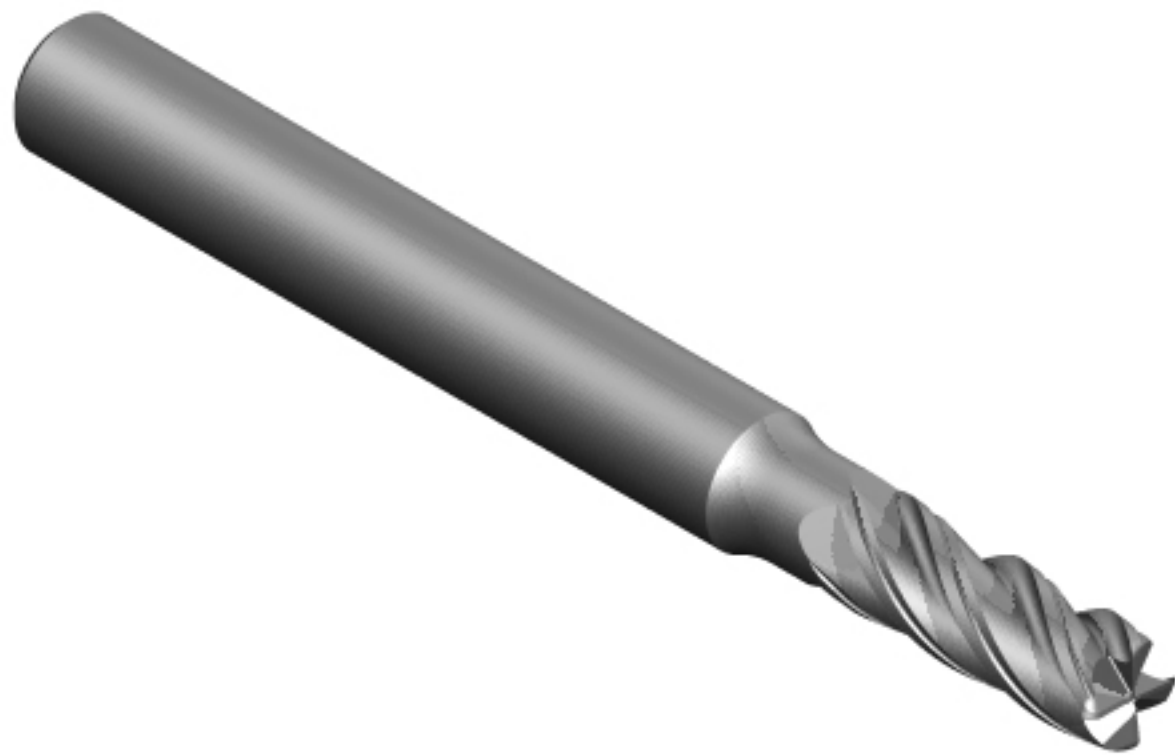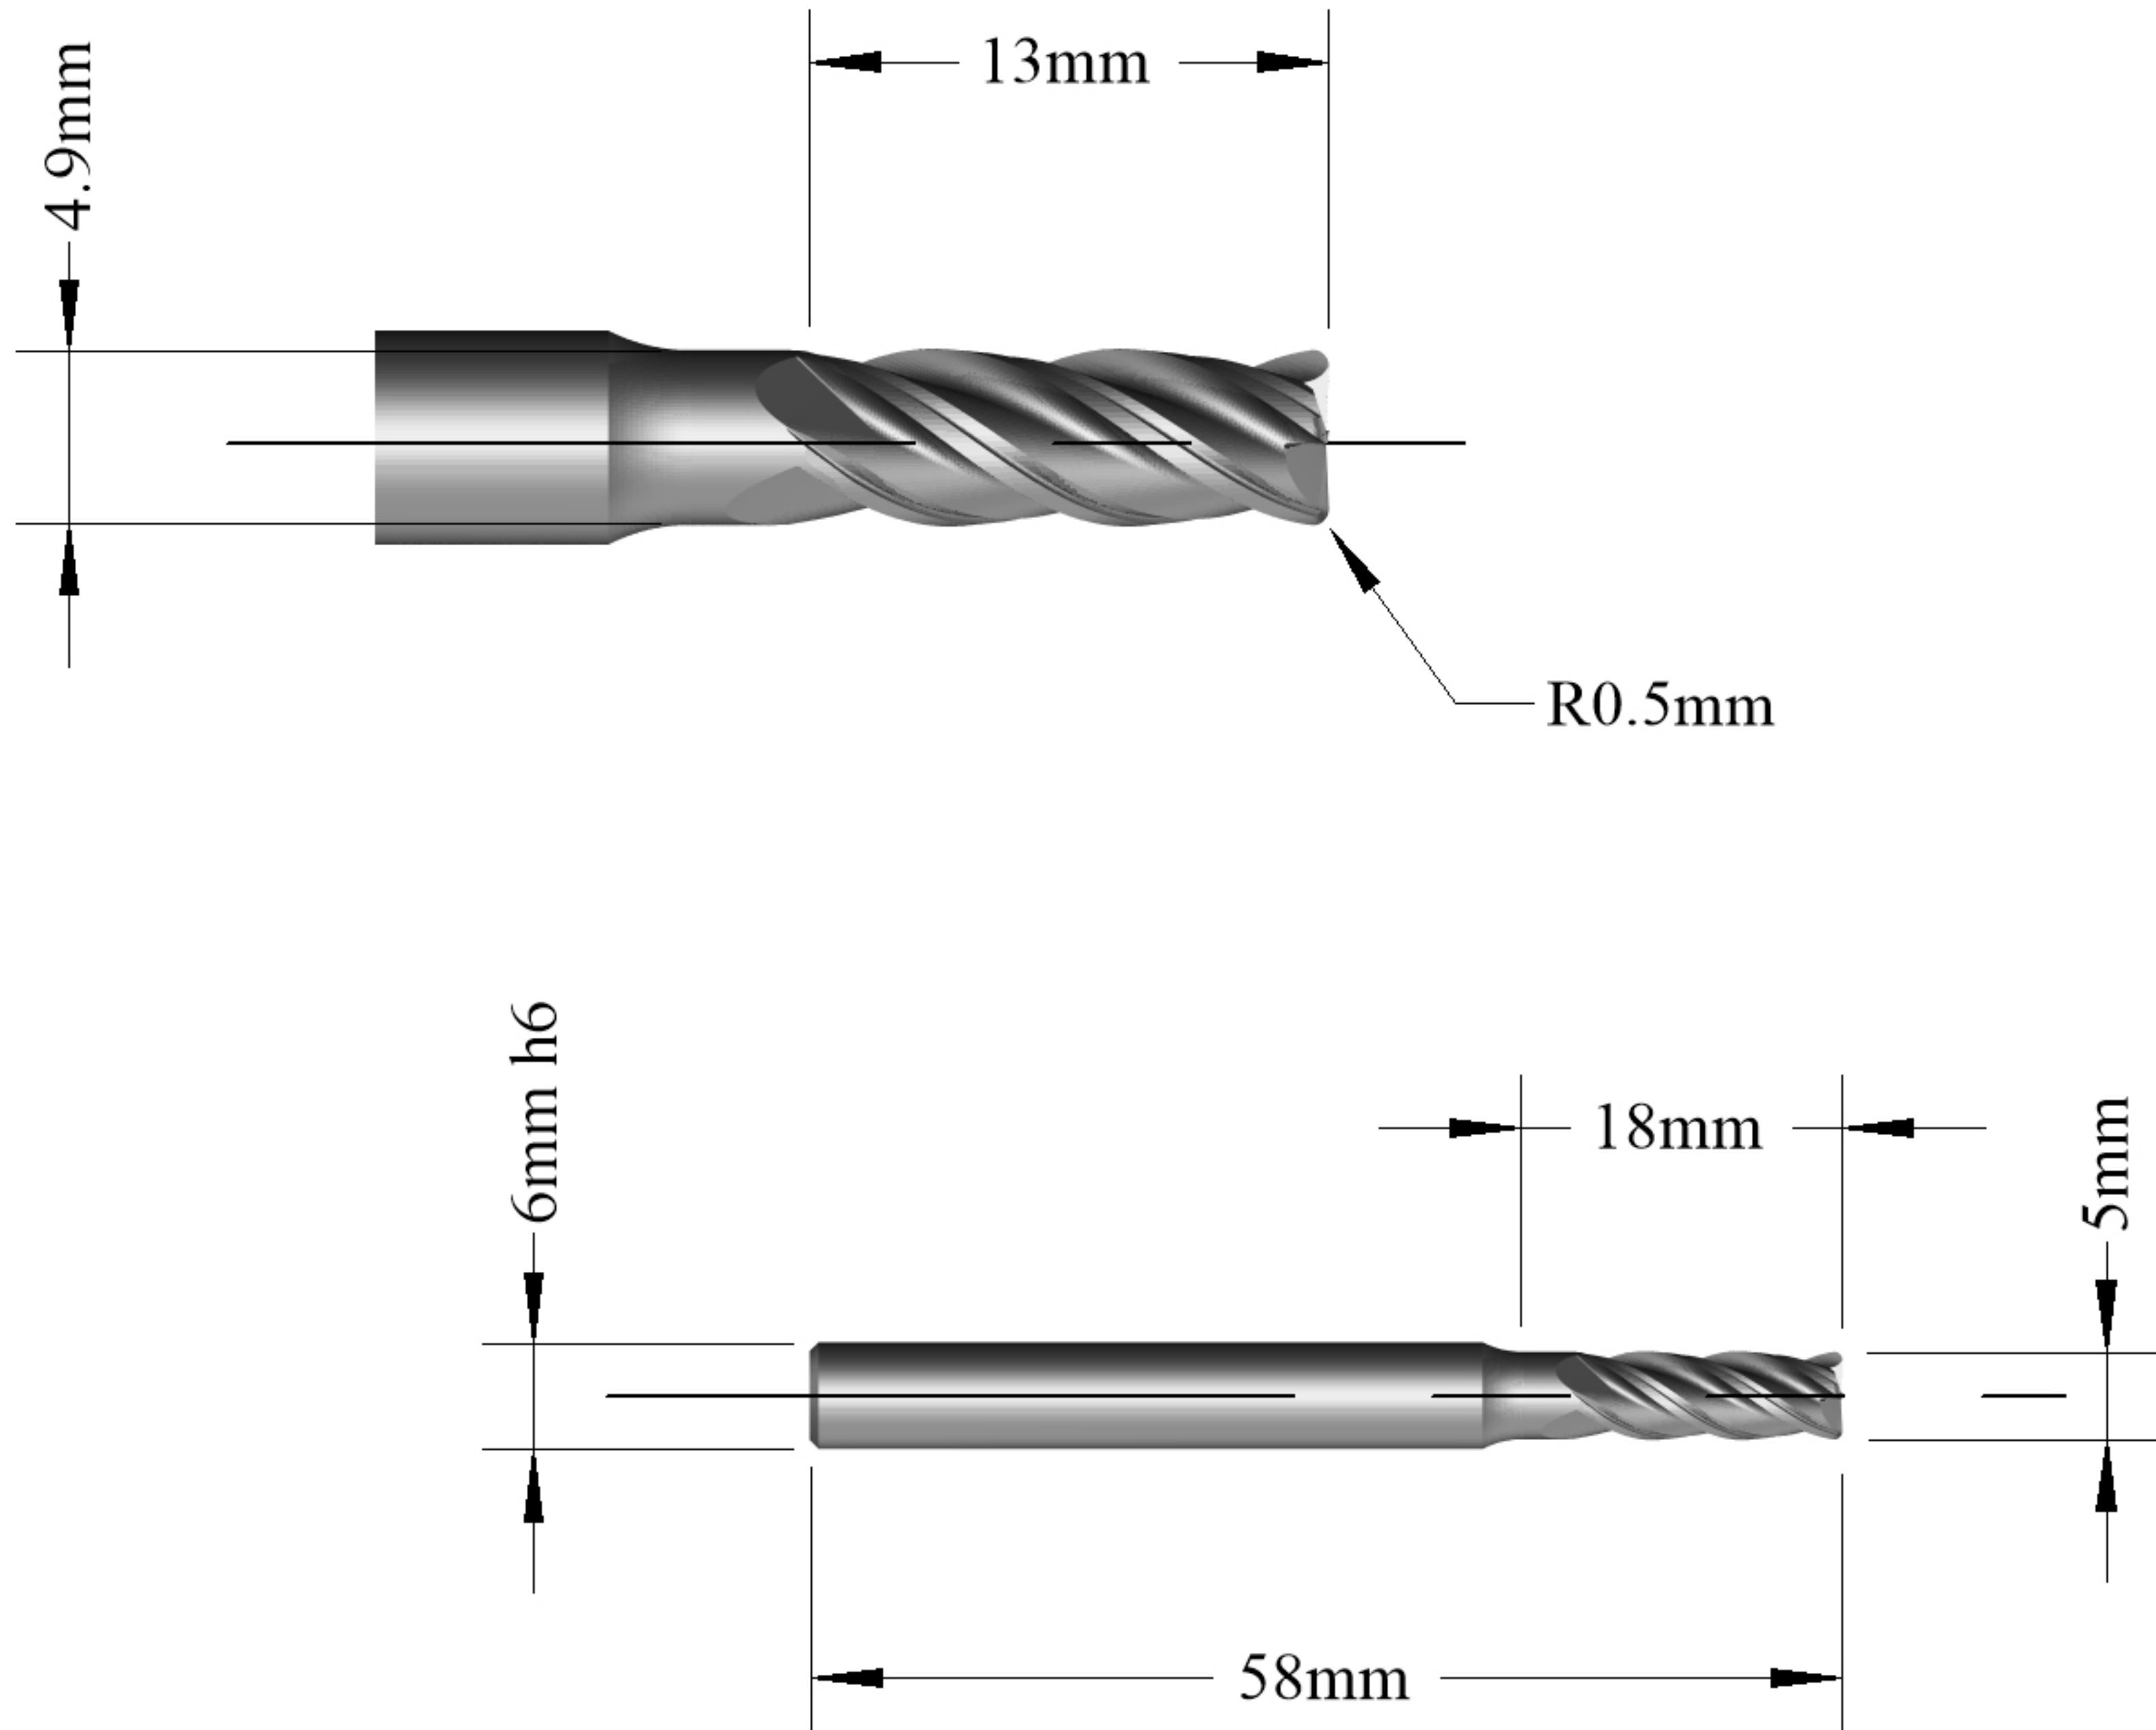

STEP	
FEED	
RPM	
TOOL LIFE	

REV.	DESCRIPTION	DATE

Unit 5701 Shannon Place, Shannon Way
Tewkesbury, Gloucestershire, GL20 8SL
T +44 (0)1684 294090 F +44 (0)1684 293168

Date: 12/10/22

Drawn: IV

Checked: KL

TITLE
Customer Drawing 4 Flute Carbide QVari CR
5mm x 13mm x 18mm R0.5mm XRed Coating

PROPRIETARY DOCUMENT
This document is not to be copied or reproduced in whole or in part or communicated to third parties without the prior written consent of Quickgrind Ltd

SIZE
A4

SPECIAL I.D
670050

QUICKGRIND PART NUMBER
CE4S5x13-18R0.5DB1A2C


REV
1

BLANK
CMD6L58

SCALE: 1 : 1

MATERIAL: Carbide

COATING: XRed



IF IN DOUBT PLEASE ASK